MRD614BA-5CCT

6" Baffle Round LED Retrofit Recessed Downlight with 5CCT Selector

| Project Name: | Order Number: | Prepare by: | Note: | Date: | Туре: | | | | |
|---------------|---------------|-------------|-------|-------|-------|--|--|--|--|
| | | | | | | | | | |
| | | | | | | | | | |

The **MRD614BA** downlight retrofit kit is designed to upgrade your existing 5 or 6 inch downlight easily. It can be fitted in a standard recessed can housing without any modification. With the 5 selectable color temperature technology you can choose your most favorite environment color temperature without changing the lamp. Our downlight provides perfect light performance, showing the true colors of objects and surroundings. You also get all other benefits of LED technology, including longer life to lower maintenance cost, less heat for better energy saving in summer.

Perfect use for residential housings, condominiums, the healthcare facility, shopping centers and hospitality industry.






Select color temperature from

- 2700K WARM WHITE
- 3000K SOFT WHITE
- 3500K NATURAL WHITE
 4000K COOL WHITE
- 5000K DAYLIGHT

DIMENSION



BATER



DIMMABLE

LIGHTING

BAFFLE FINISH


E26 Adapter included

Fits most 6"/5" recessed housings

Energy Star® and ETL cerfitted. It can be used to comply with Title-24 and JA8 high efficacy light source requirements.

TECHNICAL SUMMARY

| LUMENS | WATTS | EFFICACY | CRI | VOLTAGE | BEAM ° | ССТ | PF | LIFE | OPERATING TEMP. |
|--------|-------|----------|-----|----------------|--------|---------------------------------------|------|------------|-----------------|
| 1100 | 14W | 78 lm/W | 90 | 120V, 60 Hz | 95° | 2700K/3000K/ 3500K/ 4000K/5000K | >0.9 | 50,000 hrs | -5°F ~ 104°F |

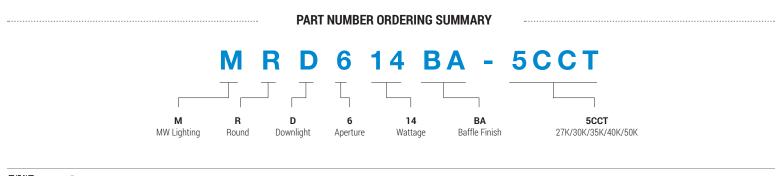



MRD614BA-5CCT

6" Baffle Round LED Retrofit Recessed Downlight with 5CCT Selector

| | 5 | | | | | | |
|---------------|---------------|-------------|-------|-------|-------|--|--|
| Project Name: | Order Number: | Prepare by: | Note: | Date: | Туре: | | |
| | | | | | | | |
| | | | | | | | |

CONSTRUCTION

Unit includes spinning metal housing, LED array, heat sink, lens, foam gasket and baffle trim ring.

OPTICS

- High quality PC lens
- Efficiency LED array
- Diffuse for uniform illumination

DRIVER

- High efficiency integral 120V 60Hz constant current dimmable driver.
- Smooth flicker free deep dimming to 10%

MOUNTING

- Fits standard or shallow 6"/5" can housing
- Pre-installed spring clips
- E26 screw base adapter included

LISTING

ETL Listed, Energy Star Listed, Suitable for Wet Locations, Title 24 JA8-2022, RoHS

WARRANTY

5 years manufacturer warranty, consult factory for more details. Terms and conditions may apply.

RECOMMENDED DIMMERS


LUTRON

- TGCL-153PH-WH
- DVCL-153PR
- P-PKG1W-WH-R
- CTCL-153PDH-WH

LEVITON

- R00-RNL06-TW
- R50-IPL06-10M

PHOTOMETRY



AVERAGE BEAM ANGLE (50%) : 95.9 DEG

COMPATIBLE PRODUCTS (SOLD SEPARATELY)



608-SH 6" New Construction Housing



608-SH-RM 6" Remodel Construction Housing



IGHTING