

MVP4FT-34-38-45W-3CCT

4' LED Commercial Vaportight with Wattage and CCT Selector

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

34-38-45 WATTS

The **MVP4FT-34-38-45W-3CCT** series

This Vapor Tight Fixtures are designed to save energy and meet low light egress requirements. It's optimal for underground parking garage compliance. Also, it's perfect for using as utility lighting, parking garage and stairwell lighting where meets applicable building and safety codes. These fixtures are DLC and UL certified. They are popular in parking lot, warehouse, public area and other commercial area.




Select color temperature from

- 3500K **NATURAL WHITE**
- 4000K **COOL WHITE**
- 5000K **DAYLIGHT**



DIMENSION

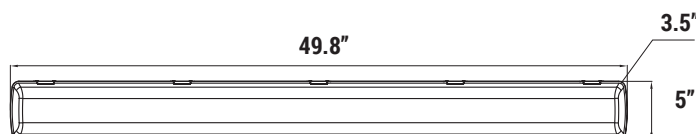

TECHNICAL SUMMARY

LUMENS	WATTS	EFFICACY	CRI	VOLTAGE	BEAM °	CCT	PF	LIFE	OPERATING TEMP.
4420 4940 5850	34W 38W 45W	130 lm/W	80	120V, 277V	140	3500K 4000K 5000K	>0.9	100,000 hrs	-40°F ~ 104°F

PART NUMBER ORDERING SUMMARY

MVP4FT-34-38-45W-3CCT

VAPORT TIGHT
MW Lighting

4'
Size

34-38-45W
Selectable Wattage

3500K-4000K-5000K
Selectable CCT



MVP4FT-34-38-45W-3CCT



4' LED Commercial Vaportight with Wattage and CCT Selector

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

CONSTRUCTION

- Unit includes heavy duty plastic frame, LED array, heat sink, and lens.
- High quality PC lens.
- Efficiency LED array.
- Diffuse for uniform illumination.
- CRI 80+

DRIVER

- 120-277V universal input voltage.
- 0-10V smooth flicker free dimmable.

MOUNTING

- Pendant Mount with V-Hook
- Surface mounting

LISTING

- DLC Listed
- UL 1598 suitable for wet locations
- UL 8750 LED equipment in Lighting Products


WARRANTY

5 years manufacturer warranty, consult www.mwledlighting.com for more details.

* Terms and conditions may apply.

*5 years limited LED luminaire warranty to the original purchaser that the luminaire shall be free from defects in materials and workmanship from date of shipment, when under properly installed at normal conditions of use. The warranty may not cover physical damage or abuse under certain conditions.

ACCESSORIES (SOLD SEPARATELY)



MHV-8W-EM

- Input Voltage 120-277V
- 8W Output
- Output Voltage 150-200Vdc



MHV-25W-EM

- Input Voltage 120-347V
- 25W Output
- Output Voltage ≤ 175 Vdc

OCCUPANCY SENSORS (SOLD SEPARATELY)



MBRI819-B-O

120-277v On/off Passive
Infrared Occupancy Sensor



MBRI819-B-D

Bi-level passive infrared
Occupancy sensor

