

MVP8FT-65-75-90W-3CCT

8' LED Commercial Vaportight with Wattage and CCT Selector

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

65-75-90 WATTS

The **MVP8FT-65-75-90W-3CCT** series

This Vapor Tight Fixtures are designed to save energy and meet low light egress requirements. It's optimal for underground parking garage compliance. Also, it's perfect for using as utility lighting, parking garage and stairwell lighting where meets applicable building and safety codes. These fixtures are DLC and UL certified. They are popular in parking lot, warehouse, public area and other commercial area.




Select color temperature from

- 3500K **NATURAL WHITE**
- 4000K **COOL WHITE**
- 5000K **DAYLIGHT**



DIMENSION

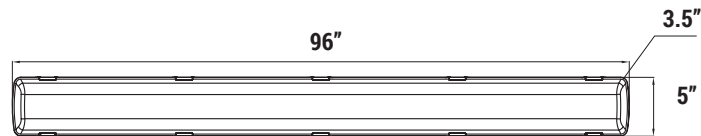

TECHNICAL SUMMARY

LUMENS	WATTS	EFFICACY	CRI	VOLTAGE	BEAM °	CCT	PF	LIFE	OPERATING TEMP.
8450	65W	130 lm/W	80	120V, 277V	140	3500K	>0.9	100,000 hrs	-40°F ~ 104°F
9750	75W					4000K			
11700	90W					5000K			

PART NUMBER ORDERING SUMMARY

MVP8FT-65-75-90W-3CCT



MVP8FT-65-75-90W-3CCT



8' LED Commercial Vaportight with Wattage and CCT Selector

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

CONSTRUCTION

- Unit includes heavy duty plastic frame, LED array, heat sink, and lens.
- High quality PC lens.
- Efficiency LED array.
- Diffuse for uniform illumination.
- CRI 80+

DRIVER

- 120-277V universal input voltage.
- 0-10V smooth flicker free dimmable.

MOUNTING

- Pendant Mount with V-Hook
- Surface mounting

LISTING

- DLC Listed
- UL 1598 suitable for wet locations
- UL 8750 LED equipment in Lighting Products

WARRANTY

5 years manufacturer warranty, consult www.mwledlighting.com for more details.

* Terms and conditions may apply.

*5 years limited LED luminaire warranty to the original purchaser that the luminaire shall be free from defects in materials and workmanship from date of shipment, when under properly installed at normal conditions of use. The warranty may not cover physical damage or abuse under certain conditions.

ACCESSORIES (SOLD SEPARATELY)



MHV-8W-EM

- Input Voltage 120-277V
- 8W Output
- Output Voltage 150-200Vdc



MHV-25W-EM

- Input Voltage 120-347V
- 25W Output
- Output Voltage \leq 175Vdc

OCCUPANCY SENSORS (SOLD SEPARATELY)



MBRI819-B-O

120-277v On/off Passive
Infrared Occupancy Sensor



MBRI819-B-D

Bi-level passive infrared
Occupancy sensor