MWVL Series

2'/3' LED Vanity Bath Light Fixture

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

This MW Lighting **MWVL** LED vanity bath light offers a modern and streamlined look for your living space. It's designed to be mounted Horizontally or vertically easily. With the powder coated painted die-formed cold-rolled steel frame and high transmission white acrylic lens, this energy-efficient product will illuminate your home for a very long period.

Perfect use for residential housings, condominiums, hotel and hospitality industry.

c UL us LISTED · ENERGY STAR · RoHS COMPLIANT · WET LOCATIONS · DIMMABLE · 5 YEARS LTD WARRANTY

DIMENSION

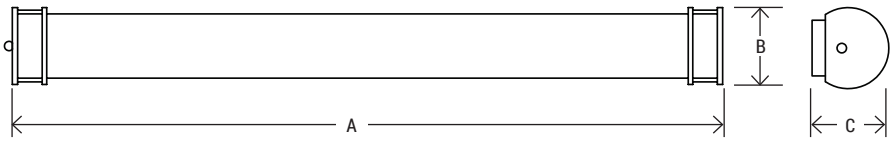

COLOR TEMPERATURE 3000K SOFT WHITE

MODEL#	MWVL2FT28W	MWVL3FT36W
A	24.8"	48.8"
B	4.11"	4.11"
C	5"	5"

TECHNICAL SUMMARY

MODEL #	LUMENS	WATTS	EFFICACY	CRI	VOLTAGE	BEAM º	CCT	PF	LIFE	OPERATING TEMP.
MWVL2FT-28W-30K	**2520**	**28W**	90 lm/W	80	**120V, 60 Hz**	104º	3000K	>0.9	50,000 hrs	-4ºF ~ 104ºF
MWVL3FT-36W-30K	**3060**	**36W**	85 lm/W							

PART NUMBER ORDERING SUMMARY

MW VL 3FT 36W 30K

- **MW** — MW Lighting
- **VL** — Vanity Light
- **2FT/3FT** — 2'/3'
- **28W/36W** — Wattage
- **30K** — 3000K

MWVL Series

2'/3' LED Vanity Bath Light Fixture

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

CONSTRUCTION
- Unit includes steel frame, LED array, heat sink, lens
- Die-formed cold-rolled steel with powder coated paint

OPTICS
- High transmission white acrylic lens with satin nickel trim
- Efficiency LED array
- Diffuse for uniform illumination

DRIVER
- 120V 60Hz input voltage
- Smooth flicker free deep dimming

MOUNTING
- Surface mount on junction box

LISTING
UL Listed, Energy Star Listed, Suitable for Wet Locations,
Title 24 JA8-2022, RoHS

WARRANTY
5 years manufacturer warranty, consult factory for more details.
Terms and conditions may apply.

PHOTOMETRY

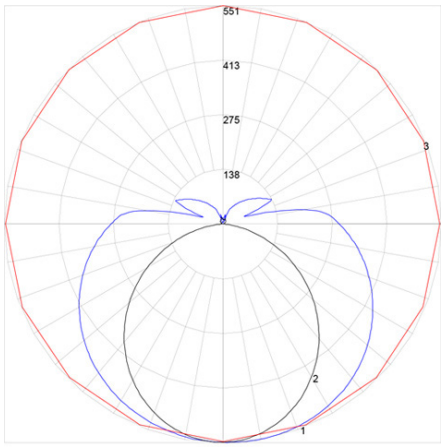

Maximum Candela = 550.95 Located At Horizontal Angle = 90, Vertical Angle = 5
1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)
2 - Vertical Plane Through Horizontal Angles (0 - 180)
3 - Horizontal Cone Through Vertical Angle (5) (Through Max. Cd.)

MWVL2FT28W30K

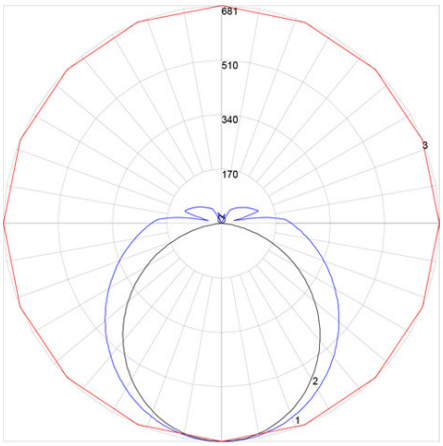

Maximum Candela = 680.53 Located At Horizontal Angle = 315, Vertical Angle = 1
1 - Vertical Plane Through Horizontal Angles (315 - 135) (Through Max. Cd.)
2 - Vertical Plane Through Horizontal Angles (0 - 180)
3 - Horizontal Cone Through Vertical Angle (1) (Through Max. Cd.)

MWVL3FT36W30K

RECOMMENDED DIMMERS

LUTRON
- TGCL-153PH-WH
- DVCL-153PR
- P-PKG1W-WH-R
- CTCL-153PDH-WH

LEVITON
- R00-RNL06-TW
- R50-IPL06-10M