

MRSD038W-5CCT



3"/4"/6"/8" Round Can-less Ultra-Slim Recessed Downlight with 5CCT Selector

| | | | | | |
|---------------|---------------|-------------|-------|-------|-------|
| Project Name: | Order Number: | Prepare by: | Note: | Date: | Type: |
| | | | | | |

CAN-LESS


The **MRSD Series** Ultra-Slim LED Downlights are the perfect lighting solution for both residential and commercial. The ultra-slim can-less design allow you to install them in where a recessed can won't fit, no can housing is needed. The quick wiring connectors are coming with the junction box, making the wiring easier-simple place the cable to the connectors to complete the wiring, no wiring nuts and electrical tap needed for the installation. Our downlight provides perfect light performance, showing the true colors of objects and surroundings. You also get all other benefits of LED technology, including longer life to lower maintenance cost, less heat for better energy saving in summer.

Perfect use for residential housings, condominiums, the healthcare facility, shopping centers and hospitality industry.



- Select color temperature from
- 2700K **WARM WHITE**
 - 3000K **SOFT WHITE**
 - 3500K **NATURAL WHITE**
 - 4000K **COOL WHITE**
 - 5000K **DAYLIGHT**

DIMENSION

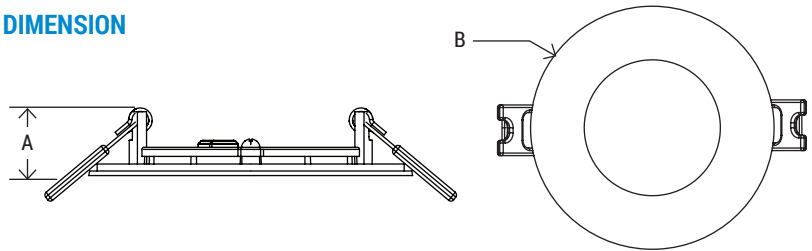


| MODEL# | MRSD3 | MRSD4 | MRSD6 | MRSD8 |
|------------------|-------|-------|-------|-------|
| A | 1.05" | 1.05" | 1.05" | 1.05" |
| B | 3.4" | 4.7" | 6.7" | 8.6" |
| Hole Size | 3.25" | 4.25" | 6.30" | 8.30" |

Energy Star® and ETL certified. It can be used to comply with Title-24 and JA8 high efficacy light source requirements.

TECHNICAL SUMMARY

| MODEL # | LUMENS | WATTS | EFFICACY | CRI | VOLTAGE | BEAM ° | CCT | PF | LIFE | OPERATING TEMP. |
|----------------------|-------------|------------|-----------|-----|----------------|--------|---|------|------------|-----------------|
| MRSD038W-5CCT | 500 | 8W | 62.5 lm/W | 90 | 120V, 60 Hz | 95° | 2700K/ 3000K/ 3500K/ 4000K/ 5000K | >0.9 | 50,000 hrs | -5°F ~ 104°F |
| MRSD410W-5CCT | 650 | 10W | 65 lm/W | | | | | | | |
| MRSD612W-5CCT | 900 | 12W | 75 lm/W | | | | | | | |
| MRSD818W-5CCT | 1500 | 18W | 83 lm/W | | | | | | | |

PART NUMBER ORDERING SUMMARY

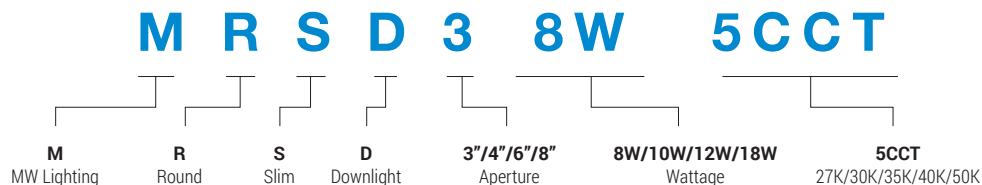

MRSD038W-5CCT



3"/4"/6"/8"

Round Can-less Ultra-Slim Recessed Downlight with 5CCT Selector

| Project Name: | Order Number: | Prepare by: | Note: | Date: | Type: |
|---------------|---------------|-------------|-------|-------|-------|
| | | | | | |

CONSTRUCTION

Unit includes spinning metal housing, LED array, heat sink, lens, and foam gasket with white ring.

OPTICS

- High quality PC lens
- Efficiency LED array
- Diffuse for uniform illumination

DRIVER

- High efficiency integral 120V 60Hz constant current dimmable driver.
- Smooth flicker free deep dimming to 10%

MOUNTING

- Can-less design, no can housing needed for the installation
- Pre-installed torsion spring clips
- Junction box included
- Quick wiring, no wiring nuts and electrical tap needed for the installation

LISTING

ETL Listed, Energy Star Listed, Suitable for Wet Locations, Title 24 JA8-2022, RoHS, Air-Tite Certified

WARRANTY

5 years manufacturer warranty, consult factory for more details. Terms and conditions may apply.



RECOMMENDED DIMMERS

LUTRON

- TGCL-153PH-WH
- DVCL-153PR
- P-PKG1W-WH-R
- CTCL-153PDH-WH

LEVITON

- R00-RNL06-TW
- R50-IPL06-10M

COMPATIBLE PRODUCTS (SOLD SEPARATELY)



MRSDMP-346

Mounting plate for 3"/4"/6" can-less downlight



MRSDMP-468

Mounting plate for 4"/6"/8" can-less downlight



M3FTCABLE M10FTCABLE

3ft/ 10ft Extension cord for can-less downlight

TRIM RING REPLACEMENT (SOLD SEPARATELY)



MW-RSD3BZ MW-RSD4BZ MW-RSD6BZ

Replacement trim ring for can-less downlight bronze finished



MW-RSD3BK MW-RSD4BK MW-RSD6BK

Replacement trim ring for can-less downlight black finished



MW-RSD3BN MW-RSD4BN MW-RSD6BN

Replacement trim ring for can-less downlight brush nickel finished