

2'/3' LED Vanity Bath Light Fixture


| Project Name: | Order Number: | Prepare by: | Note: | Date: | Type: |
|---------------|---------------|-------------|-------|-------|-------|
| | | | | | |

This MW Lighting MWVL LED vanity bath light offers a modern and streamlined look for your living space. It's designed to be mounted Horizontally or vertically easily. With the powder coated painted die-formed cold-rolled steel frame and high transmission white acrylic lens, this energy-efficient product will illuminate your home for a very long period.

Perfect use for residential housings, condominiums, hotel and hospitality industry.



DIMENSION

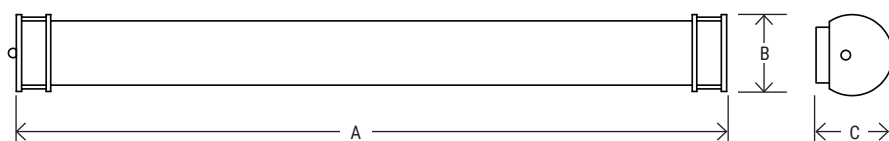

| MODEL# | MWVL2FT28W | MWVL3FT36W |
|--------|------------|------------|
| L | 24.8" | 36.69" |
| W | 4.11" | 5.25" |
| H | 5" | 5.12" |



Select color temperature from

- 3000K **NATURAL WHITE**
- 4000K **COOL WHITE**
- 5000K **DAYLIGHT**

TECHNICAL SUMMARY

| MODEL # | LUMENS | WATTS | EFFICACY | CRI | VOLTAGE | BEAM ° | CCT | PF | LIFE | OPERATING TEMP. |
|------------------|--------|-------|----------|-----|-------------|--------|-----------|------|------------|-----------------|
| MWVL2FT-25W-3CCT | 1750 | 25W | 70 lm/W | 80 | 120V, 60 Hz | 104° | 30/40/50K | >0.9 | 50,000 hrs | -4°F ~ 104°F |
| MWVL3FT-36W-3CCT | 3060 | 36W | 85 lm/W | | | | 3000K | | | |

PART NUMBER ORDERING SUMMARY

MW VL 3FT 36W 3CCT

MW
MW Lighting

VL
Vanity Light

2FT/3FT
2'/3'

28W/36W
Wattage

30/40/50K
3CCT



2/3' LED Vanity Bath Light Fixture

| Project Name: | Order Number: | Prepare by: | Note: | Date: | Type: |
|---------------|---------------|-------------|-------|-------|-------|
| | | | | | |

CONSTRUCTION

- Unit includes steel frame, LED array, heat sink, lens
- Die-formed cold-rolled steel with powder coated paint

OPTICS

- High transmission white acrylic lens with satin nickel trim
- Efficiency LED array
- Diffuse for uniform illumination

DRIVER

- 120V 60Hz input voltage
- Smooth flicker free deep dimming

MOUNTING

- Surface mount on junction box


LISTING

UL Listed, Energy Star Listed, Suitable for Wet Locations, Title 24 JA8-2022, RoHS

WARRANTY


5 years manufacturer warranty, consult factory for more details. Terms and conditions may apply.

PHOTOMETRY

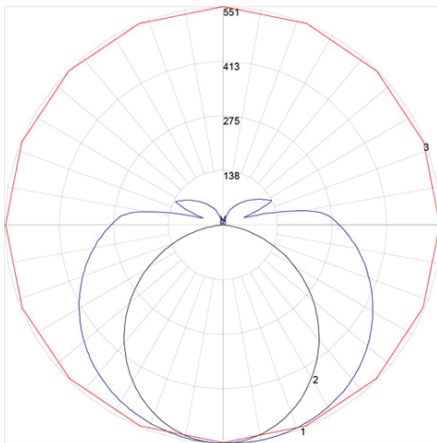

Maximum Candela = 550.95 Located At Horizontal Angle = 90, Vertical Angle = 5
 # 1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)
 # 2 - Vertical Plane Through Horizontal Angles (0 - 180)
 # 3 - Horizontal Cone Through Vertical Angle (5) (Through Max. Cd.)

MWVL2FT28W30K

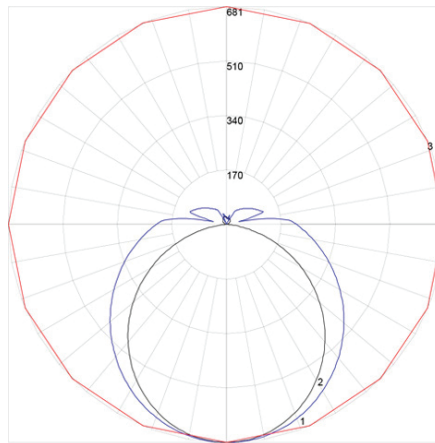

Maximum Candela = 680.53 Located At Horizontal Angle = 315, Vertical Angle = 1
 # 1 - Vertical Plane Through Horizontal Angles (315 - 135) (Through Max. Cd.)
 # 2 - Vertical Plane Through Horizontal Angles (0 - 180)
 # 3 - Horizontal Cone Through Vertical Angle (1) (Through Max. Cd.)

MWVL3FT36W30K

RECOMMENDED DIMMERS

LUTRON

- TGCL-153PH-WH
- DVCL-153PR
- P-PKG1W-WH-R
- CTCL-153PDH-WH

LEVITON

- R00-RNL06-TW
- R50-IPL06-10M