

# MRSD-DBA-120V Series



## 2" Deep Baffle Can-less Slim Recessed Downlight with 5CCT Selector - White

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

### DEEP BAFFLE CAN-LESS

The **MRSD026W-DBA** is integrated all-in-one recessed lights are the homeowners dream; perfect for value added lighting upgrades to enhance the look of your interior with the highest quality LEDs. With a low profile junction box and push and click quick connects, these lights are very easy to use. The petite 2-inch size sits flush in the ceiling without a decorative trim allowing you to create trendy pockets of light. These recessed down lights are also designed for use in new construction, remodel and retrofit installation without needing a housing or j-box. The deep baffle shape traps and narrows the light minimizing glare and softening light output for comfortable lighting.

Perfect use for residential housings, condominiums, the healthcare facility, shopping centers and hospitality industry.




**EASY-SWITCH**  
**5 CCT**  
**SELECTABLE**

- Select color temperature from
- 2700K **WARM WHITE**
  - 3000K **SOFT WHITE**
  - 3500K **NATURAL WHITE**
  - 4000K **COOL WHITE**
  - 5000K **DAYLIGHT**

**JUNCTION BOX INCLUDED**

(Junction Box picture may vary)

### DIMENSION

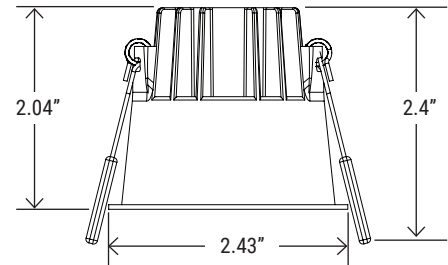


Energy Star® and ETL certified. It can be used to comply with Title-24 and JA8 high efficacy light source requirements.

### TECHNICAL SUMMARY

MODEL #	LUMENS	WATTS	EFFICACY	CRI	VOLTAGE	BEAM °	CCT	PF	LIFE	OPERATING TEMP.
<b>MRSD026W-DBA-5CCT-WH</b>	<b>370</b>	<b>6W</b>	62 lm/W	90	<b>120V, 60 Hz</b>	95°	2700K/ 3000K/ 3500K/ 4000K/ 5000K	>0.9	50,000 hrs	-5°F ~ 104°F

### PART NUMBER ORDERING SUMMARY

**M R S D 02 6W DBA - 5CCT-WH**

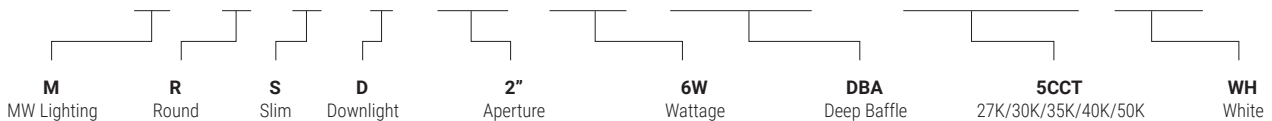

# MRSD-DBA-120V Series



## 2" Deep Baffle Can-less Slim Recessed Downlight with 5CCT Selector - White

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

### CONSTRUCTION

Unit includes spinning metal housing, LED array, heat sink, lens, and foam gasket with deep baffle white ring.

### OPTICS

- High quality PC lens
- Efficiency LED array
- Diffuse for uniform illumination

### DRIVER

- High efficiency integral 120V 60Hz constant current dimmable driver.
- Smooth flicker free deep dimming to 10%

### MOUNTING

- Can-less design, no can housing needed for the installation
- Pre-installed torsion spring clips
- Junction box included
- Quick wiring, no wiring nuts and electrical tap needed for the installation


### LISTING

ETL Listed, Energy Star Listed, Suitable for Wet Locations, Title 24 JA8-2022, RoHS, Air-Tite Certified

### WARRANTY

5 years manufacturer warranty, consult factory for more details. Terms and conditions may apply.

### PHOTOMETRY

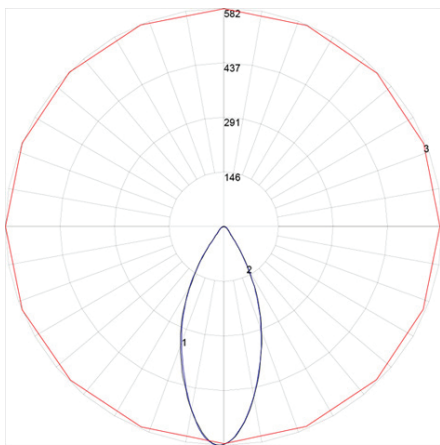

Maximum Candela = 582.18 Located At Horizontal Angle = 157.5, Vertical Angle = 1  
# 1 - Vertical Plane Through Horizontal Angles (157.5 - 337.5) (Through Max. Cd.)  
# 2 - Vertical Plane Through Horizontal Angles (0 - 180)  
# 3 - Horizontal Cone Through Vertical Angle (1) (Through Max. Cd.)

### RECOMMENDED DIMMERS

#### LUTRON

- TGCL-153PH-WH
- DVCL-153PR
- P-PKG1W-WH-R
- CTCL-153PDH-WH

#### LEVITON

- R00-RNL06-TW
- R50-IPL06-10M

### COMPATIBLE PRODUCTS (SOLD SEPARATELY)



#### MRSDMP-346

Mounting plate for 3"/4"/6" can-less downlight



#### MRSDMP-468

Mounting plate for 4"/6"/8" can-less downlight



#### M3FTCABLE M10FTCABLE

3ft/ 10ft Extension cord for can-less downlight

