

# MWP-40-50-60W-3CCT-PC

## LED Commercial Wallpack with Wattage and CCT Selector with Photocell

| Project Name: | Order Number: | Prepare by: | Note: | Date: | Type: |
|---------------|---------------|-------------|-------|-------|-------|
|               |               |             |       |       |       |

40-50-60 WATTS

The **MWP-40-50-60W-3CCT-PC** series

Robust and reliable, these 3CCT wattage adjustable LED wallpack with photocell are perfect for your industrial applications. Constructed out of heavy duty diecast aluminum with architectural baked polyester powder coating for lasting durability. The housing is well sealed to prevent moisture and insect ingress. Tempered and impact resistant prismatic borosilicate glass provides even light distribution. Color temperature can be switch to warm white 3000K, cool white 4000K and daylight 5000K. The input wattage can be adjustable to 4 different level that helps you to save energy cost.

This product is ETL certified. It is popular in warehouse, side walk, public parking lots, swimming pools, area and other commercial area.



Optional Photocell




Select color temperature from

- 3000K NATURAL WHITE
- 4000K COOL WHITE
- 5000K DAYLIGHT



### DIMENSION

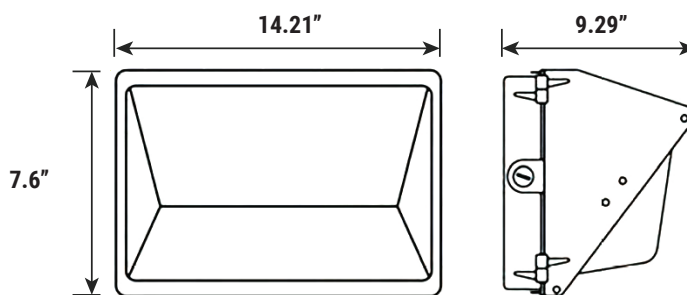

### TECHNICAL SUMMARY

| LUMENS               | WATTS             | EFFICACY | CRI | VOLTAGE       | BEAM ° | CCT                     | PF   | LIFE       | OPERATING TEMP. |
|----------------------|-------------------|----------|-----|---------------|--------|-------------------------|------|------------|-----------------|
| 5600<br>7000<br>8400 | 40W<br>50W<br>60W | 140 lm/W | 70  | 120V,<br>277V | 140    | 3000K<br>4000K<br>5000K | >0.9 | 50,000 hrs | -29°F ~ 129°F   |

### PART NUMBER ORDERING SUMMARY

## MWP-40-50-60W-3CCT-PC

WALL PACK

40-50-60W  
Selectable Wattage

3000K-4000K-5000K  
Selectable CCT

PHOTOCELL  
Photocell

# MWP-40-50-60W-3CCT-PC



## LED Commercial Wallpack with Wattage and CCT Selector with Photocell

| Project Name: | Order Number: | Prepare by: | Note: | Date: | Type: |
|---------------|---------------|-------------|-------|-------|-------|
|               |               |             |       |       |       |

### 3 CCT

- Select color temperature from 3000K natural white, 4000K cool white, or 5000K daylight for your environment.

### 3 ADJUSTABLE INPUT WATTAGE

- Wattage can be switch to 40W, 50W and 60W to save energy cost.

### CONSTRUCTION

- Unit includes heavy duty die-cast aluminum housing, impact resistant prismatic borosilicate glass, LED array, heat sink, lens and gasket.
- Tempered glass lens.

### OPTICS

- Prismatic borosilicate glass for even light distribution.
- Efficiency LED array
- CRI 70+

### DRIVER

- 120-277V universal input voltage.
- 0-10V smooth flicker free dimmable.

### MOUNTING

Designed for mounting directly on wall over a standard junction box.

### LISTING

- ELT certified
- EMI/RFI emissions per FCC 47CFR Part 15B.
- RoHS compliant, contains no mercury or lead.
- Suitable for wet locations.

### WARRANTY

5 years manufacturer warranty, consult factory for more details. Terms and conditions may apply.

\*5 years limited LED luminaire warranty to the original purchaser that the luminaire shall be free from defects in materials and workmanship from date of shipment, when under properly installed at normal conditions of use. The warranty may not cover physical damage or abuse under certain conditions.

### PHOTOMETRY

