

MGD Series



2"/3"/4" Round Gimbal Color Selectable Can-less Downlight

Round Gimbal Can-less Downlight

This gimbal Can-less downlight is available in 2", 3", and 4" sizes with 5CCT selectable color temperature, designed for adjustable directional lighting.

Featuring a tilt of up to 20°, it allows precise aiming for accent lighting, wall washing, and highlighting architectural features. Ideal for residential and light commercial spaces such as living rooms, bedrooms, kitchens, galleries, and retail environments.



MGD049W-5CCT



MGD036W-5CCT



MGD026W-5CCT




Key Features — Round Gimbal Can-less Downlight

- Sizes: 2", 3", 4" round gimbal trim
- 5CCT selectable (2700K–5000K)
- Adjustable gimbal with up to 20° tilt
- TRIAC dimming (120V)
- CRI 90+ for high-quality color rendering

	MGD026W	MGD036W	MGD049W
Color Temp.	5CCT	5CCT	5CCT
Wattage	6W	6W	9W
Lumens	370LM	370LM	540LM
Voltage	120V	120V	120V
Dimming	TRIAC	TRIAC	TRIAC
CRI	90+	90+	90+



Dimension



Item Number	A(Diameter)	B(Hight)	Hole Size
MGD026W	2.19"	1.8"	2.17"
MGD036W	3.75"	1.89"	3.15"
MGD049W	5"	1.89"	3.94"



MGD Series

2"/3"/4" Round Gimbal Color Selectable Can-less Downlight



Technical Summary

Item Number	Description	Wattage	Lumens	Color Temp.	Voltage	CRI	Dimming
MGD026W-5CCT	2" Gimbal	6W	370LM	27K/30K/35K/40K/50K	120V	90+	TRIAC
MGD036W-5CCT	3" Gimbal	6W	370LM	27K/30K/35K/40K/50K	120V	90+	TRIAC
MGD049W-5CCT	4" Gimbal	9W	540LM	27K/30K/35K/40K/50K	120V	90+	TRIAC

Construction

- Durable aluminum housing with integrated adjustable gimbal for directional lighting
- Compact can-less design with remote junction box for easy installation
- High-quality finish for clean and modern appearance

Driver

- High-efficiency LED driver
- Compatible with 120V input
- Supports TRIAC dimming
- Flicker-free performance with stable output

Optics

- 5 selectable color temperatures (2700K–5000K)
- CRI 90+ for accurate color rendering
- Directional beam control for accent and task lighting
- Smooth light output with reduced glare

Mount

- Can-less recessed installation with spring clips for secure, tool-free mounting
- Suitable for new construction and remodel applications
- Compatible with optional mounting accessories:
 - Mounting Plate for 4"/6"/8" (MRSDMP-468)
 - Mounting Plate with Junction Box for 2"/3"/4"/6"/8" (RBMP-2468-JB)
 - Mounting Plate for 2"/3"/4"/5"/6" (MRSDMP-23456)
- Wet location rated, suitable for bathrooms and covered outdoor ceilings

Dimmer Compatibility

Compatible with most standard TRIAC (forward phase) dimmers, supporting dimming down to 10%; see recommended dimmer list for tested models.

Lutron:

- DVCL-153PR
- MACL-153MLH-WH
- P-PKG1V-WH-R
- STCL-153MH-WH

Leviton:


- R11-DSL06-1TW
- R00-RNL06-0TV
- R68-06674-P0T
- R02-D26HD-1RW

Legrand:


- RHCL453PNICCV4

Photometric


MGD026W-5CCT

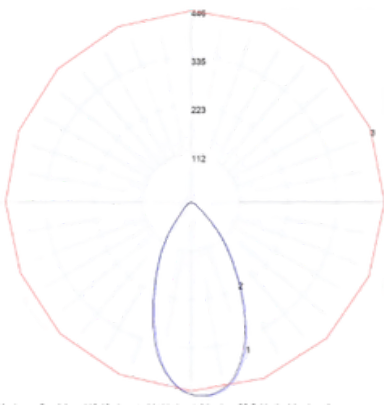

MGD036W-5CCT

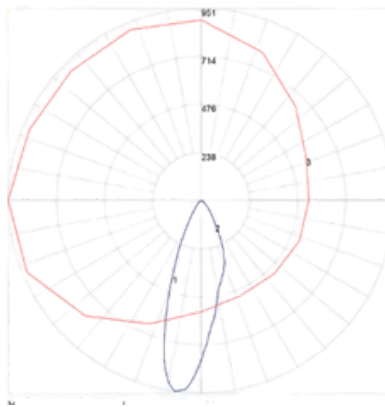

MGD049W-5CCT

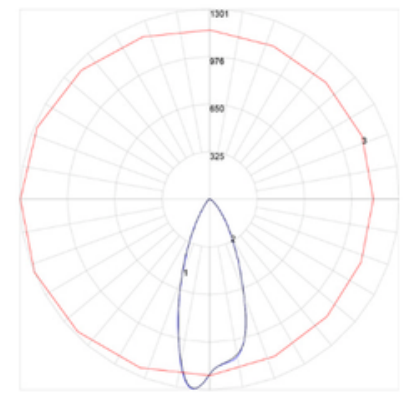


MGD Series Order Sheet

Project Name:	
Prepare By:	
Date:	
Contact/Phone:	

Accessories (SOLD SEPARATELY)


Mounting plate for 4"/6"/8" can-less downlight

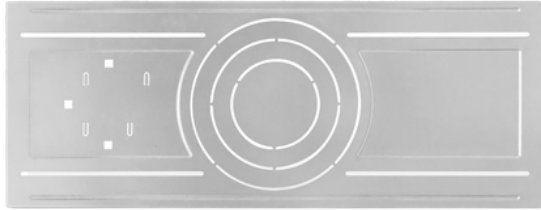

Mounting plate for 2"/3"/4"/5"/6" can-less downlight



Mounting Plate With Junction Box
2"/3"/4"/6"/8"

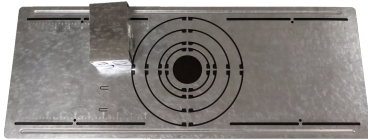

25W Emergency Driver



3/10 Ft Extension Cord



Item Number	Description
MGD026W-5CCT	2" Gimbal
MGD036W-5CCT	3" Gimbal
MGD049W-5CCT	4" Gimbal

Accessories (SOLD SEPARATELY)

Item Number	Description
RBMP-2468-JB	Mounting Plate With Junction Box 2"/3"/4"/6"/8"
MRSDMP-468	Mounting plate for 4"/6"/8" can-less downlight
MRSDMP-23456	Mounting plate for 2"/3"/4"/5"/6" Can-less downlight
MHV-25W-EM-110V	25W Emergency Driver
M3FTCABLE	3 Ft Extension Cord for Can-less Downlight
M10FTCABLE	10 Ft Extension Cord for Can-less Downlight