
# **MFR4 Series**






The **MFR4** Lighting fire resistant electric outlet box combines fire resistant junction box to the 4" recessed housing can. It fits most of the standard 4" downlight retrofit kits on the market without any modifications. With this new design, you don't need to install the fire resistant junction box and recessed housing can separately, helps you to save cost and time for your commercial projects

Perfect use for shopping center, business building, hotel, airport, hospital and other commercial buildings.

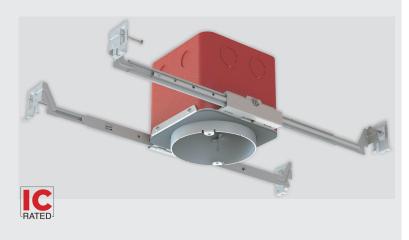

### DIMENSION

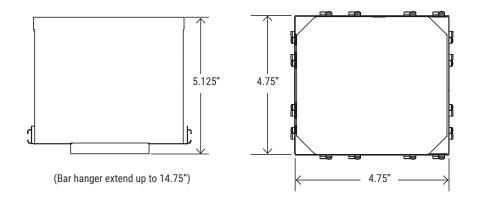


Dimension/Weight	With Bar hanger
WIDTH	6.5″
LENGTH	14.75″
WEIGHT	3.16 lbs

#### Note: Referring to BXUV. Guideinfo for Fire-resistance Ratings - ANSI/UL 263, section III.6

Metallic outlet boxes with metallic or nonmetallic cover plates may be used in floor-ceiling and roof-ceiling assemblies with ratings not exceeding 2 hours. These assemblies sh have gypsum board membranes. The metallic outlet boxes should be securely fastened to the joists and the opening in the gypsum board facing should be cut so that the cleara between the box and the gypsum board does not exceed 1/8 in. The surface area of individual boxes should not exceed 16 sq. in. The aggregate surface area of the boxes sh not exceed 100 sq. in. per 100 sq. ft of ceiling surface.







# **MFR4 Series**



4″	Fire Resist Electrical Outlet Box					MWLIGHTING	
Project I	Name:	Order Number:	Prepare by:	Note:	Date:	Туре:	

### **KEY FEATURES**

- Suitable for Wet Location
- Air Tight
- · Fits most surface mount fixtures
- Suitable for recessed fixtures
- · Solution for suspended lights with external driver

### CONSTRUCTION

• Unit includes Air Tight Gasket, Wiring Box, Hanger bar with nails, 4" Vertically adjustable Bottom Ring and Adapter Ring for Recessed Mount Fixture

## MOUNTING


· Ceiling mount for new construction

#### **APPLICATIONS**

- Surface mount fixtures
- Recessed mount fixtures

## **COMPLIANCE CERTIFICATION**

- Conforms to UL1598 Recessed Luminaire Housing rated IC
- Conforms to UL514A Metallic Outlet Box, fire rated up to 2 hours

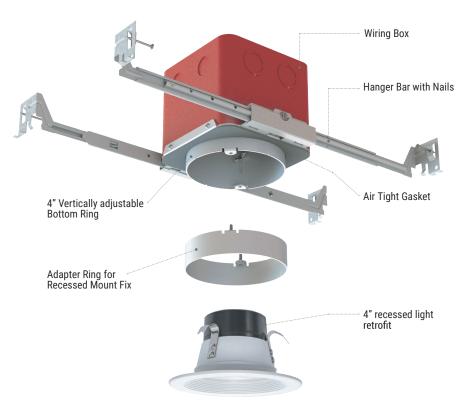

COMPATIBLE WITH SURFACE MOUNT FIXTURES AND RECESSED DOWNLIGHT RETROFIT KITS (SOLD SEPARATELY)



MRD/MSD 4" SERIES 4" Round/Square LED Retrofit Recessed Downlight



**MSSM / MRSM SERIES** Square / Round Surface Mount Downlight

#### FOR MORE INFORMATION, PLEASE CALL US!

