

COMBO COB/SMD LED EXIT EMERGENCY LIGHT


Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

This **Combo cob/smd LED exit emergency light** combines a exit sign with a optional red or green letter and dual heads that can rotate 180 degree. It combines quality and reliability with intelligent, because it is made from flame-retardant, impact-resistant thermoplastic and suitable for use in humid environment. It is UL listed and can be used for up to 90 minutes after being 24 hours fully charged.



DIMENSION

Length	20.28"
Width	3.94"
Height	1.59"

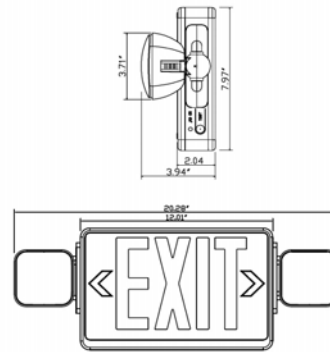

TECHNICAL SUMMARY

MODEL #	NAME	VOLTAGE	COLOR	BATTERY	RECHARGE TIME	EMERGENCY OPERATION	LED CHIPS	WATTAGE	LUMEN	CRI
MJ-2	Red Combo Exit Sign	120/277V	Red/5000k	build-in 9.6V	≤24hrs	≥90mins	12	3W	150LM	80
MJ-2G	Green Combo Exit Sign		Green/5000k							
MJ-2RG	Red/Green Combo Exit Sign		RED/Green/5000k							

ELECTRICAL

- Dual 120/277V voltage. Optional multi-tap voltage available.
- Built-in 9.6V 700mAH rechargeable Ni-cd battery for minimum 90 minutes emergency operation
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.

MOUNTING

- Innovative, easy installation in minutes.
- Universal J-box mounting pattern.

- Single or double face (Universal).
- Optional RED or GREEN letters.

HOUSING

- Injection-molded, engineering grade. 5VA flame retardant.
- High-impact resistant, thermoplastic in white or black finish.

WARRANTY/LISTING

- Two years warranty on all electronics and housing. Two years warranty for battery meets UL 924.
- cUL and UL listed for damp location (0°C-50°C).

