


Item:

MRFM1630-5CCT
MRFM2448-5CCT

16/24Inch 5CCT FLUSH MOUNT CEILING LIGHT

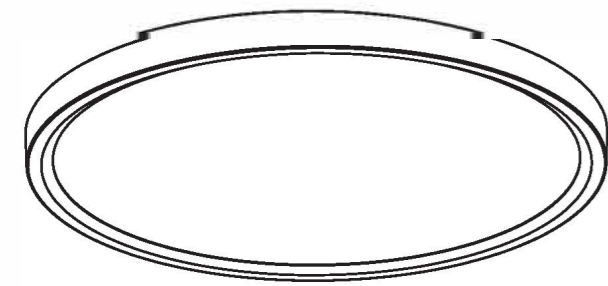

Surface Mount installation

1. Turn off the switch. Screw the bracket to the junction box and ceiling.
2. Connect the lamp body wires with power cord.
3. Push the lamp towards the ceiling and rotate the lamp to make the mounting plate and the lamp body fixed tightly.
4. Turn on the switch to check if the lamp works normally.

Stem pendant Installation (Fit to 12", 16")

1. Do not operate with power on before installation, connect the stems in serial number 1,2,3.....6
2. Twist each round stem firmly.
3. Attach the mounting bracket (7) to the bottom of the stem.
4. Use M10 nuts thread assembled stems to canopy and mounting bracket.

IMPORTANT SAFETY INFORMATION


1. WARNING : RISK OF SHOCK House electric current can cause painful shock or serious injury unless handled properly. For your safety always remember to :
A : Turn off the power supply at the fuse or circuit breaker box before you install the fixture. Double-check all connections to be sure they are tight and correct. This fixture is designed for use in a circuit protected by a fuse or circuit breaker. It is also designed to be installed in accordance with local electrical codes. If you are unsure about your wiring, consult a qualified electrician or local electrical inspector, and check your local electrical code.
3. WARNING : RISK OF CUTS Some metal parts in the fixture may have sharp edges. To prevent cuts and scrapes, wear gloves when handling the parts.
4. Account for small parts and destroy packing material, as these may be hazardous to children.
5. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person
6. Terminal block and the suspending accessories is not included. Installation must be performed by a qualified person.

TOOLS REQUIRED



NOTE: Keep your receipt and these instructions for Proof of Purchase.

PACKAGE CONTENT

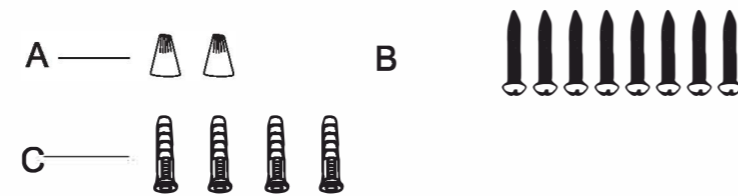

	PARTS	PCS
A	Wire Nuts	2
B	Screws	8
C	Anchors	4

Product Specification

No	Wattage(w)	Voltage(V)	Rated Input Frequency(Hz)	Beaming(°)	Size(in)
1	30W	AC120V	60Hz	120°	φ15x0.94
2	48W		60Hz	120°	φ24x0.94

Stem pendant Installation (Fit to 12", 16")

5. Turn off the input power to the luminaire and fix the concave bracket to the junction box with screws.
6. Connect power cord to supply wires from the canopy.
7. Mount the stem to the top bracket and rotate it clockwise to secure.
8. Connect supply wires from the mounting bracket to the supply wires of the luminaire.

Stem pendant Installation (Fit to 12", 16")

9. Secure the luminaire to the mounting bracket by rotating the luminaire clockwise.
10. Shake the lamp body to test the reliability of the installation, and turn the power on. Installation complete.

Stainless Steel Cable Suspension Installation (Fit to 24")

1. Accessories pre-installed (as shown).
2. Accessories pre-installed (as shown).

Recommended dimmer:

Leviton 6672-1LW
MACL-153MR-WHLutron
SCL-153P-WHLutron
PD-6WCL-WHLutron
Lutron CTCL-153P-WHLutron MSCL-OP153M-WHLutron DVCL-153P-WH

Caution

1. WARNING : Risk of fire. Use AC120V 60Hz circuits.
2. Suitable for damp locations. Before installing your lighting fixture, thoroughly review enclosed installation manual. If you do not have sufficient electric wiring experience, please refer to a professional wiring handbook or have your fixture installed by a qualified licensed electrician. All electrical connections must be in accordance with local and National Electrical Code (NEC) standards. Reliable operating temperature is -20 to +40 degrees Celsius (-4 to +104 degrees Fahrenheit).
3. Please obey fire prevention regulations, do not cover the fixture with any heat insulated materials.
4. Do not change the LED light source or driver inside under any circumstance.

Warranty: 5 years warranty This product is for indoor use only For use with dimmers

WARNING

This product is warranted for 5 years from the date of purchase. If this product does not perform to the specifications supplied on this package, send an email to us for product return and replacement. This replacement is the sole remedy available. Liability for incidental or consequential damage is expressly excluded.

Stainless Steel Cable Suspension Installation (Fit to 24")

3. Accessories pre-installed (as shown).
4. Turn off power firstly, mount the U-shaped bracket to the pre-built junction box with screws.
5. Connect the LN wires from the pendant to the external input LN wires, and U-shaped bracket ground wire to the external input ground wire.
6. Assemble the steel wire strain relief into the canopy central hole and tighten it into the thread hole in the middle of the U-shaped bracket, then adjust the steel wire length to make it well balance with the mounting bracket. Secure the wire once the length is verified.
7. Connect LN wires from the luminaire to LN wires from mounting bracket, then secure the anti-release steel wire on the mounting bracket and rotate the luminaire in the direction as Figure 7 to lock.
8. Final assembly.