# **MRFM Series**

| Round Slim Surface Mount |
|--------------------------|
|--------------------------|

| Project Name: | Order Number: | Prepare by: | Note: | Date: | Туре: |
|---------------|---------------|-------------|-------|-------|-------|
|               |               |             |       |       |       |
|               | ]             | 1           |       |       |       |

### DESCRIPTION

Recessed lighting and bigger flush mounts are commonly being replaced by these edge-lit flush mounts in order to maintain ceiling height. The wide illumination is ideal for lighting corridors and other small areas, and it mounts over junction boxes of conventional size. Smaller sizes are also treated with a moist location for outdoor use, and they come in a variety of sizes.




**VLIGHTING** 



# **Product Imformation**

| Model No.     | Product Name                 | Lumens | Watts | Efficacy | CRI | VOLTAGE | DIMMING | ССТ  | LIFE       | OPERATING TEMP. |
|---------------|------------------------------|--------|-------|----------|-----|---------|---------|------|------------|-----------------|
| MRFM511-5CCT  | 5" round slim Surface mount  | 700    | 11W   | 63.6lm/w | 80+ | 120V    | TRIAC   | 5CCT | >50,000hrs | -4°F ~ 104°F    |
| MRFM714-5CCT  | 7" round slim Surface mount  | 960    | 14W   | 68.6lm/w | 80+ | 120V    | TRIAC   | 5CCT | >50,000hrs | -4°F ~ 104°F    |
| MRFM920-5CCT  | 9" round slim Surface mount  | 1400   | 20W   | 70lm/w   | 80+ | 120V    | TRIAC   | 5CCT | >50,000hrs | -4°F ~ 104°F    |
| MRFM1225-5CCT | 12" round slim Surface mount | 2000   | 25W   | 80lm/w   | 80+ | 120V    | TRIAC   | 5CCT | >50,000hrs | -4°F ~ 104°F    |

### **DIMENSIONS** ·

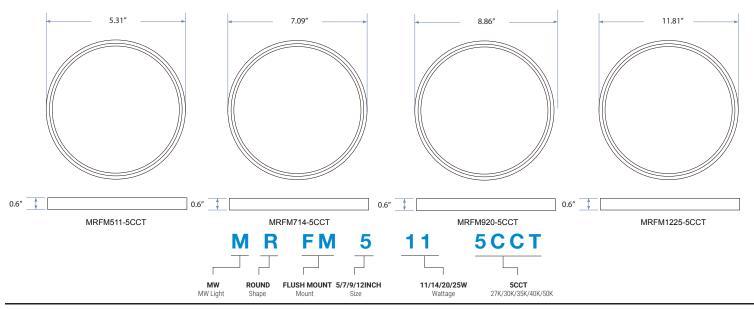





# **MRFM Series**

# Round Slim Surface Mount

| Project Name: | Order Number: | Prepare by: | Note: | Date: | Туре: |
|---------------|---------------|-------------|-------|-------|-------|
|               |               |             |       |       |       |
|               |               |             |       |       | L     |

# **PHOTOMETRY**

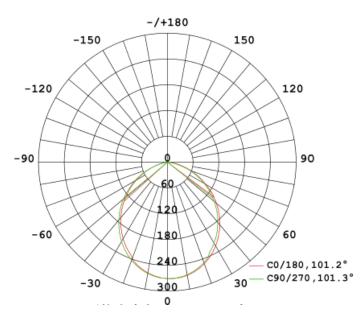



**IGHTING** 

# **TECHNICAI SUMMARY**

#### CONSTRUCTION

Unit includes metal housing , LED array, heat sink lens, with white plastic trim cover.

#### **OPTICS**

- High quality PC lens
- Efficiency LED array
- Diffuse for uniform illumination

#### DRIVER

- High efficiency integral 120V 60Hz constant current dimmable driver.
- Smooth flicker free deep dimming to 10%

#### MOUNTING

- Surface mount on junction box.
- Surface mounting bracket included.

#### LISTING

ETL Listed, Energy Star Listed, Suitable for Wet Locations, Title 24 JA8-2022, RoHS, Air-Tite Certified

#### WARRANTY

5 years manufacturer warranty, consult factory for more details. Terms and conditions may apply.

#### **RECOMMENDED DIMMERS**

#### LUTRON

- TGCL-153PH-WH
- DVCL-153PR
- P-PKG1W-WH-R
- CTCL-153PDH-WH

#### LEVITON

- R00-RNL06-TW
- R50-IPL06-10M



# **MRFM Series**

| <b>MW</b> LIGHTING |
|--------------------|

| Round Slim Surface Mount |
|--------------------------|
|--------------------------|

| Project Name: | Order Number: | Prepare by: | Note: | Date: | Туре: |
|---------------|---------------|-------------|-------|-------|-------|
|               |               |             |       |       |       |
|               |               |             |       |       |       |

### **FEATURES** -

