

# MDDMS Series



## 4"/6" Plastic Trim Surface Mount Light with Motion Sensor - White

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

### PLASTIC TRIM SURFACE MOUNT


This **MDDMS** Series Surface Mount Disk Light Fixture came with a built-in motion sensor, turns the light ON at dusk automatically when movement is detected. With the 15ft detect range and 65-degree detect angle, it's perfect for the hallway, closet and other location that the motion-activated wall switches is not able to be install, makes your life more convenient while helps you to save more energy.

Perfect use for residential housings, condominiums, business building, hotel and hospitality industry.




### MOTION SENSOR

- High Sensitive Sensor for 15ft

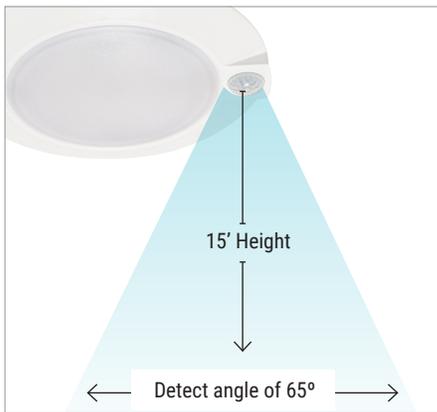

### DIMENSION

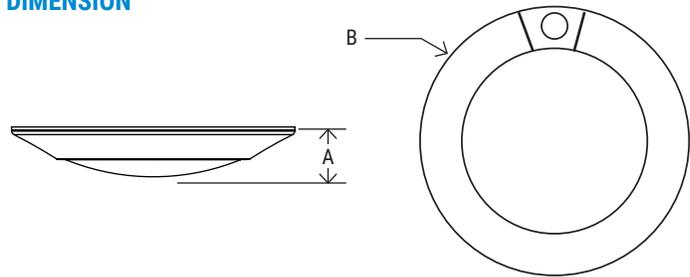


MODEL#	HEIGHT	DIAMETER
<b>MDDMS410-30K-WH</b>	1.22"	6.61"
<b>MDDMS614-30K-WH</b>	1.38"	7.72"

### TECHNICAL SUMMARY

MODEL #	LUMENS	WATTS	EFFICACY	CRI	VOLTAGE	BEAM °	CCT	PF	LIFE	OPERATING TEMP.
<b>MDDMS410-30K-WH</b>	<b>650</b>	<b>10W</b>	65 lm/W	90	<b>120V-60 Hz</b>	110°	3000K	>0.9	50,000 hrs	-5°F ~ 104°F
<b>MDDMS614-30K-WH</b>	<b>900</b>	<b>14W</b>	71 lm/W							

### PART NUMBER ORDERING SUMMARY

**M D D M S 6 1 4 - 3 0 K - W H**

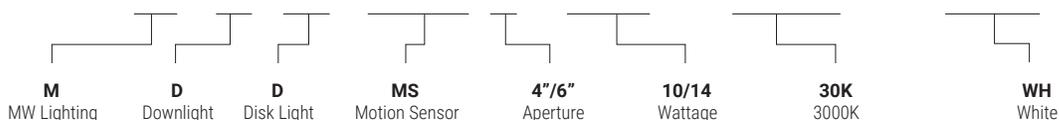

# MDDMS Series



## 4"/6" Plastic Trim Surface Mount Light with Motion Sensor - White

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

### CONSTRUCTION

- Unit includes die-cast metal housing, LED array, heat sink, lens, and metal trim.

### OPTICS

- High quality PC lens
- Efficiency LED array
- Diffuse for uniform illumination

### DRIVER

- High efficiency integral 120V 60Hz constant current dimmable driver.
- Smooth flicker free deep dimming to 10%

### MOUNTING

- Surface mount on junction box
- Surface mounting bracket included


### LISTING

ETL Listed, Energy Star Listed, Suitable for Wet Locations, Title 24 JA8-2022, RoHS

### WARRANTY


5 years manufacturer warranty, consult factory for more details. Terms and conditions may apply.

### PHOTOMETRY

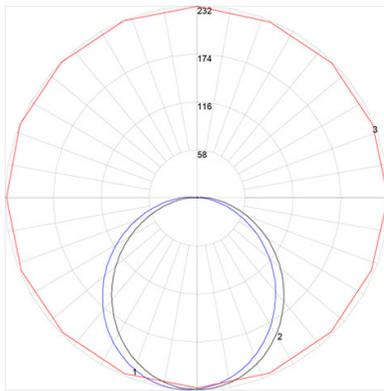

Maximum Candela = 232.14 Located At Horizontal Angle = 157.5, Vertical Angle = 4  
# 1 - Vertical Plane Through Horizontal Angles (157.5 - 337.5) (Through Max. Cd.)  
# 2 - Vertical Plane Through Horizontal Angles (0 - 180)  
# 3 - Horizontal Cone Through Vertical Angle (4) (Through Max. Cd.)

MDDMS410-30K-WH

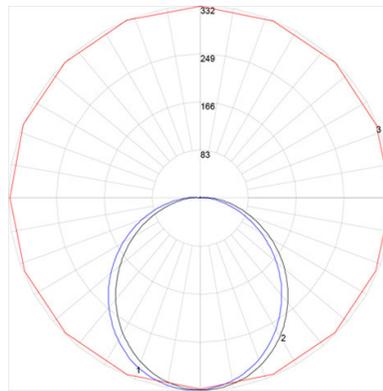

Maximum Candela = 331.95 Located At Horizontal Angle = 112.5, Vertical Angle = 3  
# 1 - Vertical Plane Through Horizontal Angles (112.5 - 292.5) (Through Max. Cd.)  
# 2 - Vertical Plane Through Horizontal Angles (0 - 180)  
# 3 - Horizontal Cone Through Vertical Angle (3) (Through Max. Cd.)

MDDMS614-30K-WH

### RECOMMENDED DIMMERS

#### LUTRON

- TGCL-153PH-WH
- DVCL-153PR
- P-PKG1W-WH-R
- CTCL-153PDH-WH

#### LEVITON

- R00-RNL06-TW
- R50-IPL06-10M