

# MTFE24-30/40/50W-3CCT

## WATTAGE AND CCT SELECTABLE LED TROFFER LIGHT

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:


The **MTFE** series is ideal for supermarkets, shops, warehouses, workshops, or barns, this lighting solution offers 3CCT selectability with color temperatures ranging from 3500K to 4000K to 5000K. The wattage is selectable at 30W, 40W, or 50W allowing various brightness levels with lumen outputs of 2200LM, 3300LM, 4400LM, or 5500LM. Designed for versatility, it operates on 120-277V with a continuous 0-10-volt dimming driver and is rated for high ambient temperatures up to 113°F, with a low start temperature of -4°F. This fixture is ETL suitable for damp locations.



- 3500K NATURAL WHITE
- 4000K COOL WHITE
- 5000K DAYLIGHT



### DIMENSION

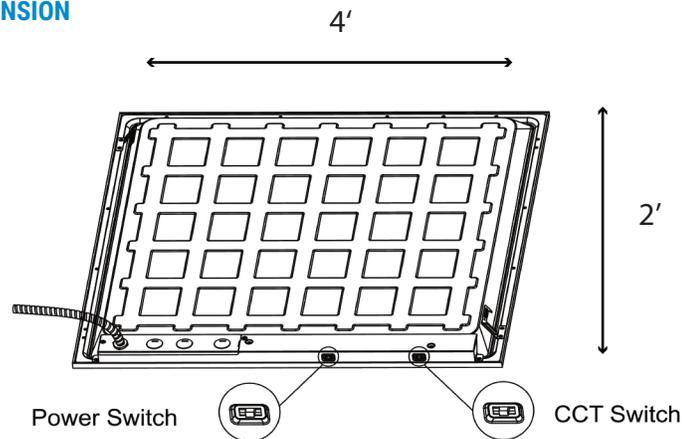

### TECHNICAL SUMMARY

MODEL NO.	WATTS	LUMENS	CCT	VOLTAGE	DIMMING	CRI	CERTIFICATION
MTFE22-20/30/40W-3CCT	20/30/40W	2200/3300/4400LM	35/40/50K	AC120-277V	0-10V	80+	ETL/ FCC
MTFE24-30/40/50W-3CCT	30/40/50W	3300/4400/5500LM	35/40/50K	AC120-277V	0-10V	80+	ETL/ FCC

### PART NUMBER ORDERING SUMMARY

# MTFE24-30/40/50W-3CCT

LED TROFFER LIGHT  
MW Lighting

30/40/50W  
Selectable Wattage

3500K-4000K-5000K  
CCT



# MTFE24-30/40/50W-3CCT



## WATTAGE AND CCT SELECTABLE LED TROFFER LIGHT

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

### CONSTRUCTION

- Unit includes heavy duty metal frame, LED array, heat sink, hanger, security cable and high quality PC lens.

### OPTICS

- Diffuse for uniform illumination.
- CRI 80+

### DRIVER

- 120 - 277V 60Hz universal input voltage
- 0 - 10v smooth flicker free dimming down to 5%

### MOUNTING

Pendant mount to the ceiling

### LISTING

- ETL Listed
- FCC certified

### WARRANTY

5 years manufacturer warranty, consult [www.mwledlighting.com](http://www.mwledlighting.com) for more details.

\* Terms and conditions may apply.

\*5 years limited LED luminaire warranty to the original purchaser that the luminaire shall be free from defects in materials and workmanship from date of shipment, when under properly installed at normal conditions of use. The warranty may not cover physical damage or abuse under certain conditions.

### HIGHLIGHT



#### BUILT FOR EXTREME TEMPERATURE

Rated for high ambient temperatures up to 113F and low start temperature down to -4F, making it suitable for challenging environments such as warehouse and workshops.

#### DURABLE AND SAFE CONSTRUCTION

Built with high-quality materials to withstand daily wear, and includes inherent fire protection, minimizing the risk of fire.