

MBLP24-4WS-4CCT

2x4 Back-lit LED Flat Panel Light, 120-347V

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

The MBLPL24-4WS-4CCT back-lit panel light provides excellent solution for commercial and industrial applications by offering even edge to-edge lighting. Color temperature can be switch to 3000K soft white, 3500K neutral white, 4000K cool white and 5000K daylight. The input wattage can be adjustable to 4 different level that helps you to save energy cost. With the ultra thin design they are perfect for applications with shallow drop ceilings. This fixture is DLC and UL certified. It is popular in office, warehouse, public area and other commercial area.




Select color temperature from

- 3000K **SOFT WHITE**
- 3500K **NATURAL WHITE**
- 4000K **COOL WHITE**
- 5000K **DAYLIGHT**



DIMENSION

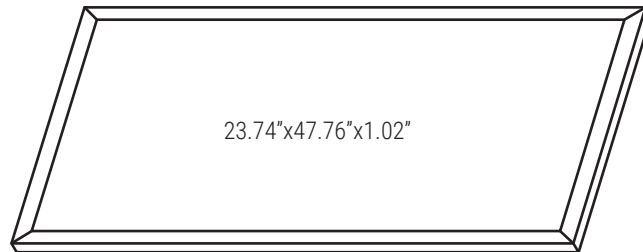

TECHNICAL SUMMARY

MODEL NO.	WATTS	LUMENS	CCT	VOLTAGE	DIMMING	CRI	CERTIFICATION
MBLP24-4WS-4CCT	50/60/70/90W	6000/7000/8000/10000LM	30/35/40/50K	120-347V	0-10V	80+	ETL/DLC

PART NUMBER ORDERING SUMMARY

MBLP24-4WS-4CCT

Back-lit Panel
MW Lighting

50/60/70/90W
Selectable Wattage

3000/3500/4000/5000K
Selectable CCT

MBLP24-4WS-4CCT



2x4 Back-lit LED Flat Panel Light, 120-347V

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

CONSTRUCTION

- Unit includes heavy duty metal frame, LED array, heat sink, hanger, security cable and high quality PC lens.

OPTICS

- Diffuse for uniform illumination.
- CRI 80+

DRIVER

- 120 - 277V 60Hz universal input voltage
- 0 - 10v smooth flicker free dimming down to 5%

*5 years limited LED luminaire warranty to the original purchaser that the luminaire shall be free from defects in materials and workmanship from date of shipment, when under properly installed at normal conditions of use. The warranty may not cover physical damage or abuse under certain conditions.

MOUNTING

- Unit includes aluminum housing, LED array, lens and mounting hooks

LISTING

- FCC Listed
- UL 8750 LED equipment in Lighting Products

WARRANTY

5 years manufacturer warranty, consult www.mwledlighting.com for more details.

* Terms and conditions may apply.

HIGHLIGHT



3 ADJUSTABLE INPUT WATTAGE

Wattage can be switch to 30W, 40W and 50W to save energy cost.

3 SELECTABLE CCT

Select color temperature from 3500K natural white, 4000K cool white, or 5000K daylight for your environment.