

MLWL Series

LED Landscape Well Light

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:


The MLWL-SHLD series features a die-cast aluminum body with a frosted PC lens, designed for standard U.S. junction pipes. Available in black or ORB finishes, it is ideal for wet locations and offers easy installation. Operating efficiently on 12-24V AC/DC, it functions within a temperature range of -4°F to 104°F. Consuming only 6W of power, it boasts a CRI of over 90Ra and utilizes copper cable material, delivering 450-520 lumens with a 5CCT color temperature. The optical lens and shield design help minimize glare while focusing the light. Rated IP65, this fixture is perfect for low-voltage landscape lighting applications such as pathways, driveways, decks, and gardens.



MLWL-6W-30K-SHLD



DIMENSION

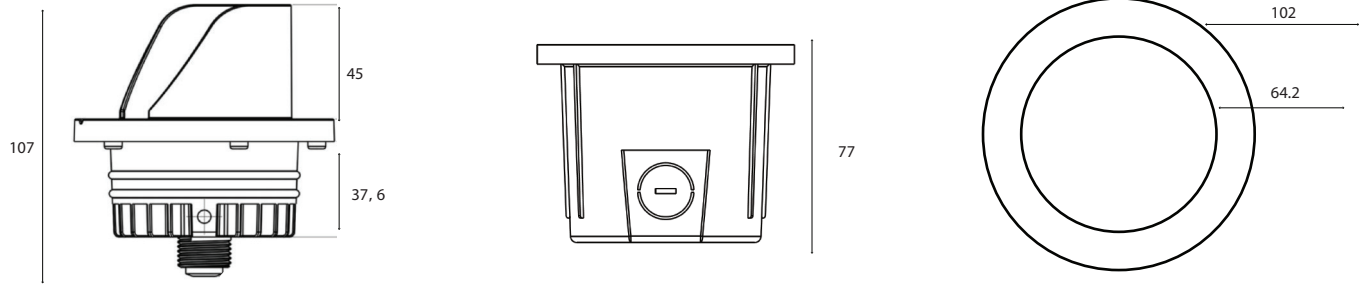

TECHNICAL SUMMARY

MODEL NO.	TOP	WATTS	LUMENS	CCT	VOLTAGE	DIMMING	CRI	CERTIFICATION
MLWL-6W-30K-FLAT	Open Flat Top	6W	520LM	27/30/35/40/50K	12-24V	N/A	N/A	ETL
MLWL-6W-30K-LVER	Louver Top	6W	520LM	27/30/35/40/50K	12-245V	N/A	N/A	ETL
MLWL-6W-30K-SHLD	Shielded Top	6W	520LM	27/30/35/40/50K	12-24V	N/A	N/A	ETL

PART NUMBER ORDERING SUMMARY

MLWL-6W-30K-SHLD

Landscape Well Light
MW Lighting

6W
Wattage

30K
CCT

Shielded Top
Various Top

LED Landscape Well Light

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

CONSTRUCTION

- Unit includes heavy duty metal frame, LED array, heat sink, hanger, security cable and high quality LED tube.

WARRANTY

5 years manufacturer warranty, consult www.mwledlighting.com for more details.

* Terms and conditions may apply.

MOUNTING

-

HIGHLIGHT

Durable Construction

Made from die-cast aluminum, ensuring long-lasting durability and resistance to harsh outdoor conditions.

Easy Installation

Designed for standard U.S. junction pipes, allowing for quick and hassle-free setup.