

MWPS Series



3CCT LED Slim Wallpack

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

The MWPS-30/40/50W-3CCT and MWPS-60/70/80W-3CCT series are durable, 3CCT wattage-adjustable LED wall packs designed for industrial and commercial use. Constructed with heavy-duty diecast aluminum and sealed to prevent moisture and insect ingress, they feature tempered borosilicate glass for even light distribution. Color temperatures are adjustable (3000K/4000K/5000K), and wattage can be tuned for energy savings. The 30/40/50W models offer 4050-6750 lumens, while the 60/70/80W models provide 8100-10800 lumens, making them ideal for warehouses, parking lots, and public areas. Operating on 120-277V with 0-10V dimming and 80+ efficiency, they are UL and DLC-certified for reliability and performance.




Select color temperature from

- 3000K **NATURAL WHITE**
- 4000K **COOL WHITE**
- 5000K **DAYLIGHT**



MWPS-30/40/50W-3CCT

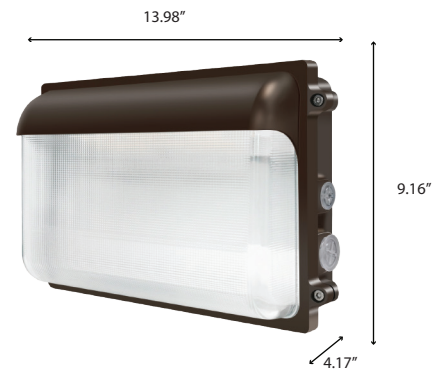

MWPS-60/70/80W-3CCT

TECHNICAL SUMMARY

MODEL NO.	WATTS	LUMENS	CCT	VOLTAGE	DIMMING	CRI	CERTIFICATION
MWPS-30/40/50W-3CCT	30/40/50W	4050/5400/6750L	30/40/50K	AC120-277V	0-10V	80+	UL, DLC
MWPS-60/70/80W-3CCT	60/70/80W	8100/9450/10800L	30/40/50K	AC120-277V	0-10V	80+	UL, DLC

PART NUMBER ORDERING SUMMARY

MWPS-30/40/50W-3CCT

Wallpack Slim
MW Lighting

30/40/50W
Selectable Wattage

30/40/50K
CCT

MWPS Series



3CCT LED Slim Wallpack

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

CONSTRUCTION

- Unit includes heavy duty metal frame, LED array, heat sink, hanger, security cable and high quality PC lens.

OPTICS

- Diffuse for uniform illumination.
- CRI 80

DRIVER

- 120 - 277V 60Hz universal input voltage
- 0 - 10v smooth flicker free dimming down to 5%

MOUNTING

Mount to the wall

LISTING

- DLC Listed
- UL 8750 LED equipment in Lighting Products

WARRANTY

5 years manufacturer warranty, consult www.mwledlighting.com for more details.

* Terms and conditions may apply.

*5 years limited LED luminaire warranty to the original purchaser that the luminaire shall be free from defects in materials and workmanship from date of shipment, when under properly installed at normal conditions of use. The warranty may not cover physical damage or abuse under certain conditions.

HIGHLIGHT



Versatile Lighting Control

Adjustable color temperature 3000/4000/5000K and wattage setting allow for customized lighting and energy savings

Durable & Reliable Design

Built with heavy-duty diecast aluminum, sealed housing, and tempered borosilicate glass, ensuring durability and even light distribution for industrial and commercial applications.