

# M10CDSM35W-3CCT

## 10" Commercial Smooth Downlight

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:


### COMMERCIAL DOWNLIGHT

The MW Lighting 10-inch Commercial Smooth Downlight (Model: M10CDSM35W-3CCT) delivers bright, consistent illumination with selectable wattage options (22W/28W/35W) and adjustable color temperatures (3000K/4000K/5000K). Producing up to 3700 lumens, it offers powerful performance for large commercial and residential spaces. Designed with a smooth trim for a clean, modern appearance, it complements a wide range of ceiling styles. Featuring TRIAC and 0-10V dimming, a long 50,000-hour lifespan, and easy canless installation, this fixture ensures superior energy efficiency, reliability, and professional lighting quality—perfect for offices, retail stores, classrooms, corridors, and hospitality environments.



- Select color temperature from
- 3000K **SOFT WHITE**
  - 4000K **COOL WHITE**
  - 5000K **DAYLIGHT**

#### DIMENSION

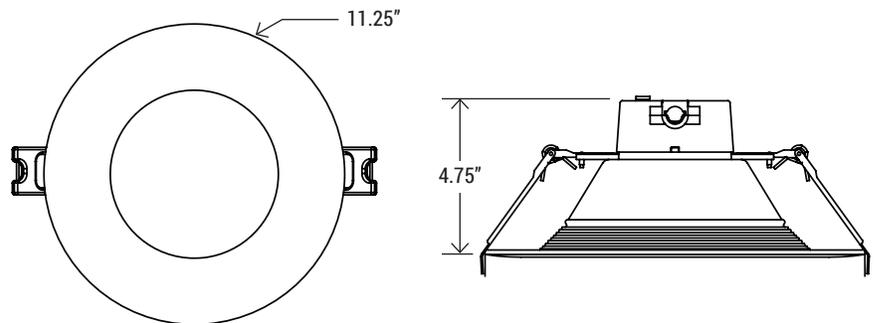

Energy Star® and ETL certified. It can be used to comply with Title-24 and JA8 high efficacy light source requirements.

#### TECHNICAL SUMMARY

MODEL #	LUMENS	WATTS	EFFICACY	CRI	VOLTAGE	Dimming	CCT	PF	LIFE	OPERATING TEMP.
<b>M10CDSM35W-3CCT</b>	2300/ 3000/ 3700	22W/ 28W/ 35W	105 lm/W	80	120V- 277V, 60 Hz	TRIAC / 0-10V	3000K/ 4000K/ 5000K	>0.9	50,000 hrs	-5°F ~ 104°F

#### PART NUMBER ORDERING SUMMARY

## M 10 CDSM 35W - 3CCT



# M10CDSM35W-3CCT



## 10" Commercial Smooth Downlight

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

### CONSTRUCTION

Unit includes die-cast metal housing, LED array, heat sink, lens, foam gasket, baffle trim ring, safety cable with hook and junction box.

### OPTICS

- High quality PC lens
- Efficiency LED array
- Diffuse for uniform illumination
- Baffle trim reduces glare for soft, comfortable illumination

### DRIVER

- 120V-277V 60Hz universal input voltage
- 0-10V smooth flicker free dimming to 5%

### MOUNTING

- Canless design, no can housing needed for the installation
- Pre-installed torsion spring clips
- Unit comes with wiring nuts, no electrical tap and special tools required for the installation


### LISTING

ETL Listed, Energy Star Listed, Suitable for Wet Locations, Title 24 JA8-2022, RoHS, Air-Tite Certified

### WARRANTY

5 years manufacturer warranty, consult factory for more details. Terms and conditions may apply.

### PHOTOMETRY

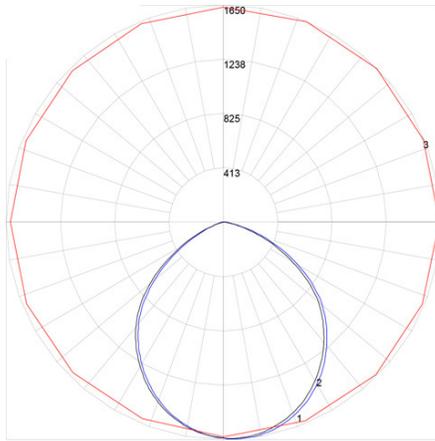

Maximum Candela = 1650.4 Located At Horizontal Angle = 45, Vertical Angle = 5  
# 1 - Vertical Plane Through Horizontal Angles (45 - 225) (Through Max. Cd.)  
# 2 - Vertical Plane Through Horizontal Angles (0 - 180)  
# 3 - Horizontal Cone Through Vertical Angle (5) (Through Max. Cd.)

### RECOMMENDED DIMMERS

#### LUTRON

- TGCL-153PH-WH
- DVCL-153PR
- P-PKG1W-WH-R
- CTCL-153PDH-WH

#### LEVITON

- R00-RNL06-TW
- R50-IPL06-10M


### COMPATIBLE PRODUCTS (SOLD SEPARATELY)



**MRSDMP-346**  
Mounting plate for 3"/4"/6"  
can-less downlight



**MRSDMP-468**  
Mounting plate for 4"/6"/8"  
can-less downlight



**MHV-8W-EM**  
Emergency Driver and  
Battery Back-up



**MHV-25W-EM**  
High Output Voltage Emer-  
gency Driver and Battery  
Back-up



**ICCDR10-BlackTrim**  
Replacable trim available  
in black color.

