

MWRAP-12/16/20/25W-5CCT



2 FT Wraparound Light

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

DESCRIPTION



The MW Lighting 2FT LED Wraparound Fixture delivers high-performance lighting with selectable wattage (12W/16W/20W/25W) and adjustable color temperature (3000K/3500K/4000K/5000K/6500K). Providing up to 3000 lumens of bright, uniform illumination, it is ideal for offices, corridors, classrooms, and utility areas. Designed for easy surface mounting, this fixture features a durable steel housing with a frosted lens for soft, glare-free light. With energy-efficient performance and a long lifespan, it's a reliable solution for both new construction and retrofit projects.



Select color temperature from

- 3000K **Soft White**
- 3500K **NATURAL WHITE**
- 4000K **COOL WHITE**
- 5000K **DAYLIGHT**
- 6500K **Cool Daylight**




Product Information

Model No.	Product Name	Lumens	Watts	Efficacy	CRI	VOLTAGE	DIMMING	CCT	LIFE	OPERATING TEMP.
MWRAP-12/16/20/25W-3CCT	2 FT Wraparound	1500/2000/2500/ 3000LM	12/16/20/ 25W	125lm/w	80+	120V, 277V	0-10V	5CCT	>50,000hrs	-4°F ~ 104°F

DIMENSIONS

2 FT

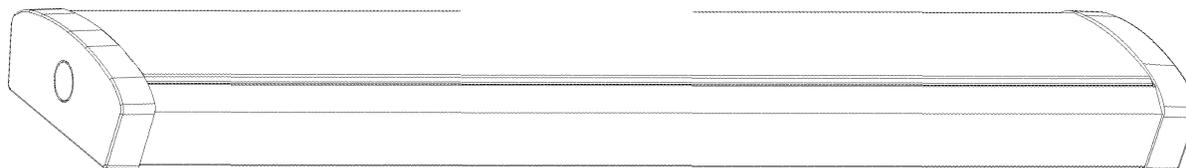

MWRAP-12/16/20/25W-5CCT

WRAPAROUND
MW Lighting

12/16/20/25W
Selectable Wattage



3000K-3500K-4000K
-5000K-6500K
Selectable CCT

MWRAP-12/16/20/25W-5CCT

2 FT Wraparound Light

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

PHOTOMETRY

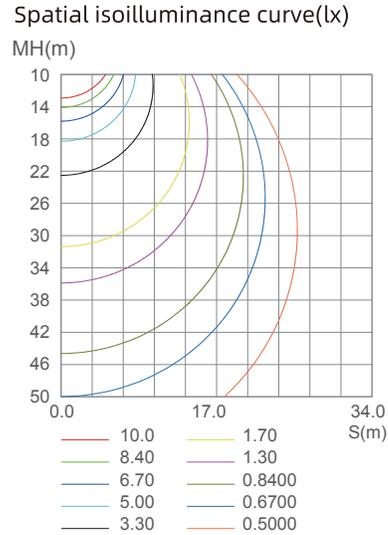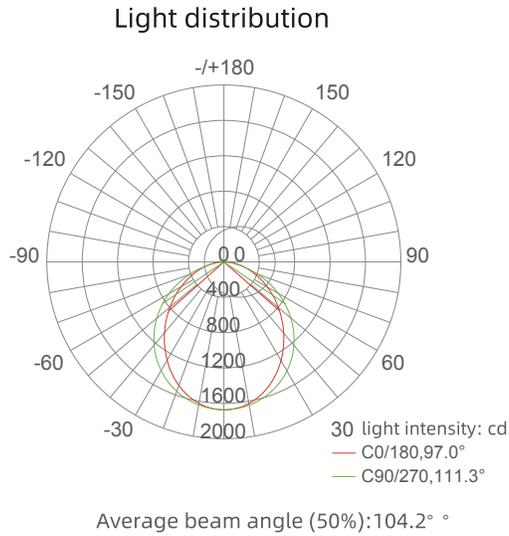

TECHNICAL SUMMARY

CONSTRUCTION

- Unit includes heavy duty metal frame, LED array, heat sink, and lens.
- High quality PC lens.
- Efficiency LED array.
- Diffuse for uniform illumination.
- CRI 80+.

DRIVER

- 120-277V universal input voltage.
- 0-10V smooth flicker free dimmable.

MOUNTING

- Surface mounting.

LISTING

- UL 8750 LED equipment in Lighting Products.

WARRANTY

- 5 years manufacturer warranty, consult factory for more details.
- Terms and conditions may apply.

ACCESSORIES (SOLD SEPARATELY)



MHV-8W-EM

- Input Voltage 120-277V
- 8W Output
- Output Voltage 150-200Vdc



MHV-25W-EM

- Input Voltage 120-347V
- 25W Output
- Output Voltage ≤ 175Vdc

OCCUPANCY SENSORS (SOLD SEPARATELY)



MBRI819-B-0

120-277v On/off Passive Infrared Occupancy Sensor



MBRI819-B-D

Bi-level passive infrared Occupancy sensor