

M408-SH-RM/M608-SH-RM

4"/6" Remodel Construction Shallow Housing



4"/6" Remodel Construction Shallow Housing

The 608-SH-RM/408-SH-RM IC type remodel shallow can housings is designed for both ceiling joists installations and drop ceiling (with T-bar grid) installations. It can be completely covered by thermal insulation. Also, the fixture may direct contact with any combustible material like ceiling joist or floor board safely. The 608-SH-RM/408-SH-RM is a Title 24 compliant, no screw based socket or other medium-based incandescent socket adapters are needed.




Key Features — 4"/6" Remodel Construction Shallow Housing

- Available in 4" and 6" shallow housing sizes
- Designed for remodel and retrofit applications
- IC-rated housing for direct insulation contact
- Suitable for ceiling joist and drop ceiling T-bar installations
- Shallow housing design for limited ceiling clearance
- Safe for direct contact with combustible materials
- Title 24 compliant
- No screw-based socket adapters required
- Durable construction for long-term reliability



Technical Summary

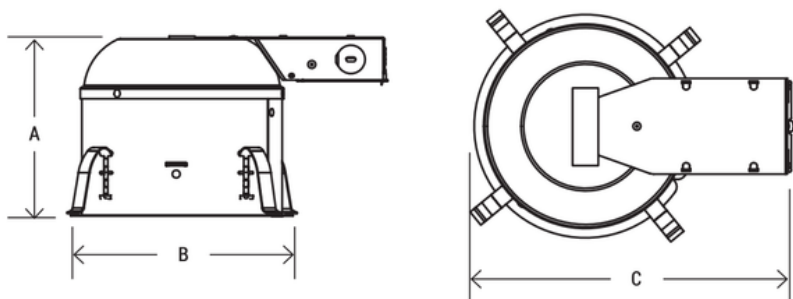

Item Number	A	B	C
M408-SH-RM	4.62"	4.75"	7.75"
M608-SH-RM	5.5"	6.75"	9.75"





MWLIGHTING

M408-SH-RM/M608-SH-RM

4"/6" Remodel Construction Shallow Housing

Construction

- Durable metal housing construction
- Compact shallow-profile design
- Designed for safe insulation contact applications
- Reliable performance for remodel installations

Mounting

- Suitable for remodel and retrofit ceiling installations
- Compatible with ceiling joists and drop ceiling T-bar grids
- Can be completely covered by thermal insulation
- Designed for secure recessed fixture installation

Compliance & Certification

- IC Rated
- Title 24 Compliant
- Suitable for direct contact with combustible materials

Project Name:	
Prepare By:	
Date:	
Contact/Phone:	

