

LED T8 TUBE Series - 6WATT&6CCT

6 Watt & 6 CCT Tunable, 5 Years Warranty

Led T8 Tube Type B – Ballast Bypass

(6WATT&6CCT Tunable, 8FT)

- 6 WATT & 6 CCT Switch in one tube
- Alu-PC T8 tube with good heat dissipation
- Lower the stock risk
- Easy for installation
- Environmentally friendly without mercury
- 5 Years Warranty, Rated for 50,000 hours



Product Specification

Model	ZS-T8-40P4FT-AB-FMM	Watt	40-36-32-28-24 -20W Tunable
Input Voltage	AC100-277V	Efficiency	120-130lm/W
Length	8FT	Material	Aluminum+PC
CRI	>80	Operation Temperature	-20°C to 60°C
CCT	3000K/3500K/4000K/5000K/6000K/6500K (6 CCT tunable)	Environment	Dry, Damp
Base Type	FA8	Rated Lifetime	50,000 hours

LED T8 TUBE Series - 6WATT&6CCT

6 Watt & 6 CCT Tunable, 5 Years Warranty


Installation Instructions

1.Replacement for bypass ballast fluorescent lamps (Type A)

Electronic ballast


professional installation is required

- 1:Turn off power before installation
- 2:Replace traditional fluorescent tube with LED tube
- 3:Switch on electricity and check for lamp starting

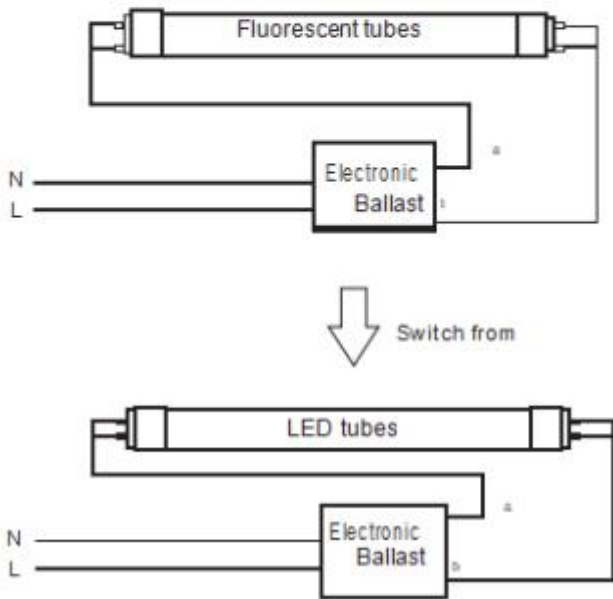

2. Replacement for bypass ballast fluorescent lamps (Type B)

TYPE B (AC DIRECTLY, DOUBLE END BALLAST BYPASS))



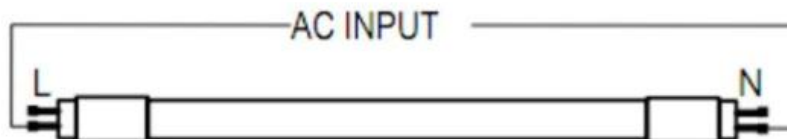


LED T8 TUBE Series - 6WATT&6CCT

6 Watt & 6 CCT Tunable, 5 Years Warranty

Package

Size	Case	Carton Dimension	kg/ctn	20GP	40HQ
8FT	15pcs/case	96.60*7.28*4.33 inch	7.50	8,400pcs	20,000pcs

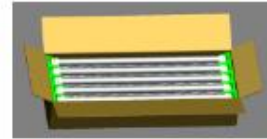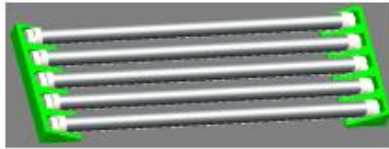

Thick Carton



Paperboard on the top



Good Package

Order Details

Item No.	Lumen (lm)	Watt	CCT	Base	Length	ETL
ZS-T8-40P8FT-AB-FMM	120-130lm/W	40-36-32-28-24-20	3000K/3500K/4000K/5000K/6000K/6500K	FA8	8FT	YES

Applications



Edeka supermarket in Germany
德国EDEKA连锁超市



Auto showroom, parking lot in Netherlands
荷兰汽车展厅, 地下停车场