

# MRSD-DBA-347V Series



**4"/6"** Deep Baffle Can-less Slim Recessed Downlight with 5CCT Selector - White

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

## DEEP BAFFLE CAN-LESS



The **MRSD-DBA Series** Deep Baffle Slim Recessed downlight available in 4" and 6", offers anti-glare eye protection to create gentle, balanced and natural lighting on your eyes. These recessed down lights are also designed for use in new construction, remodel and retrofit installation without needing a housing or j-box. The deep baffle shape traps and narrows the light minimizing glare and softening light output for comfortable lighting.

Perfect use for residential housings, condominiums, the healthcare facility, shopping centers and hospitality industry.



- Select color temperature from
- 2700K **WARM WHITE**
  - 3000K **SOFT WHITE**
  - 3500K **NATURAL WHITE**
  - 4000K **COOL WHITE**
  - 5000K **DAYLIGHT**

### DIMENSION

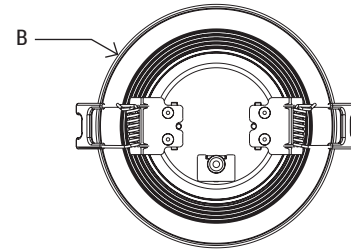

MODEL#	MRSD412W-DBA	MRSD612W-DBA
<b>A</b>	2.06"	2.06"
<b>B</b>	5.09"	7.32"

Energy Star® and ETL certified. It can be used to comply with Title-24 and JA8 high efficacy light source requirements.

### TECHNICAL SUMMARY

MODEL #	LUMENS	WATTS	EFFICACY	CRI	VOLTAGE	BEAM °	CCT	PF	LIFE	OPERATING TEMP.
<b>MRSD412W-DBA-5CCT-WH-347</b>	<b>750</b>	<b>12W</b>	62 lm/W	90	<b>120V-347V, 60 Hz</b>	95°	2700K/ 3000K/ 3500K/ 4000K/ 5000K	>0.9	50,000 hrs	-5°F ~ 104°F
<b>MRSD615W-DBA-5CCT-WH-347</b>	<b>1100</b>	<b>15W</b>	73 lm/W							

### PART NUMBER ORDERING SUMMARY

**M R S D 6 15W DBA - 5CCT-WH-347**

<b>M</b>	<b>R</b>	<b>S</b>	<b>D</b>	<b>4"/6"</b>	<b>12W/15W</b>	<b>DBA</b>	<b>5CCT</b>	<b>WH</b>	<b>120V-347V</b>
MW Lighting	Round	Slim	Downlight	Aperture	Wattage	Deep Baffle	27K/30K/35K/40K/50K	White	Voltage



# MRSD-DBA-347V Series



4"/6"

Deep Baffle Can-less Slim Recessed Downlight with 5CCT Selector - White

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

## CONSTRUCTION

Unit includes spinning metal housing, LED array, heat sink, lens, and foam gasket with baffle white ring.

## OPTICS

- High quality PC lens
- Efficiency LED array
- Diffuse for uniform illumination

## DRIVER

- High efficiency integral 120V 60Hz constant current dimmable driver.
- Smooth flicker free deep dimming to 10%

## MOUNTING


- Can-less design, no can housing needed for the installation
- Pre-installed torsion spring clips
- Junction box included
- Quick wiring, no wiring nuts and electrical tap needed for the installation

## LISTING

ETL Listed, Energy Star Listed, Suitable for Wet Locations, Title 24 JA8-2022, RoHS, Air-Tite Certified

## WARRANTY

5 years manufacturer warranty, consult factory for more details. Terms and conditions may apply.

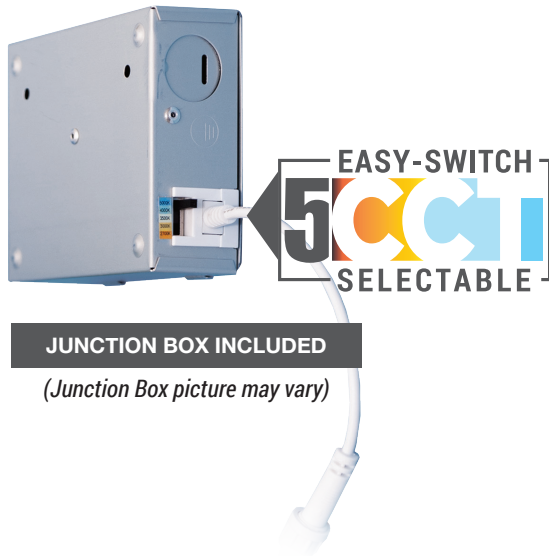

## RECOMMENDED DIMMERS

### LUTRON

- TGCL-153PH-WH
- DVCL-153PR
- P-PKG1W-WH-R
- CTCL-153PDH-WH

### LEVITON

- R00-RNL06-TW
- R50-IPL06-10M

## COMPATIBLE PRODUCTS (SOLD SEPARATELY)



### MRSDMP-346

Mounting plate for 3"/4"/6" can-less downlight



### MRSDMP-468

Mounting plate for 4"/6"/8" can-less downlight



### M3FTCABLE M10FTCABLE

3ft/ 10ft Extension cord for can-less downlight

