

# TS-GCP084-40W-G-50K



## LED GARAGE CANOPY

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

40 WATTS


- The **TS-GCP084-40W-G-50K** series
- Fins designed heat sink for better heat dissipation
  - Professional light distribution technique, high light reflectivity reflectors
  - 155° beam angle
  - Light transmission rate of lens is over 90%
  - Weather proof



Select color temperature from

- 5000K **DAYLIGHT**

### DIMENSION

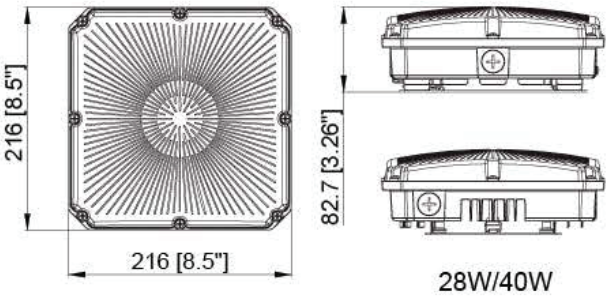

### TECHNICAL SUMMARY

LUMENS	WATTS	EFFICACY	CRI	VOLTAGE	BEAM °	CCT	PF	LIFE	OPERATING TEMP.
5200	40W	120 lm/W	80	120V, 277V	155	5000K	>0.9	50,000 hrs	-4°F ~ 104°F

### PART NUMBER ORDERING SUMMARY

**TS-GCP084-40W-G-50K**

CANOPY  
MW Lighting

40W  
Wattage

5000K  
CCT



# TS-GCP084-40W-G-50K



## LED GARAGE CANOPY

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

### CONSTRUCTION

- Unit includes heavy duty metal frame, LED array, heat sink and high quality PC lens.

### OPTICS

- Diffuse for uniform illumination.
- CRI 80+

### DRIVER

- 120 - 277V 60Hz universal input voltage
- 0 -10v smooth flicker free deep dimming to 5%

### MOUNTING

- Ceiling mount
- Surface mount

### LISTING

- UL certified
- EMI/RFI emissions per FCC 47CFR Part 15B.
- Wet location listed

### WARRANTY

5 years manufacturer warranty, consult [www.mwledlighting.com](http://www.mwledlighting.com) for more details.  
\* Terms and conditions may apply.

\*5 years limited LED luminaire warranty to the original purchaser that the luminaire shall be free from defects in materials and workmanship from date of shipment, when under properly installed at normal conditions of use. The warranty may not cover physical damage or abuse under certain conditions.

### ACCESSORIES (SOLD SEPARATELY)



emergency driver - p83



Motion Sensor - p82

